


B.O.M. Type Bladder Specifications

APRIL 2007

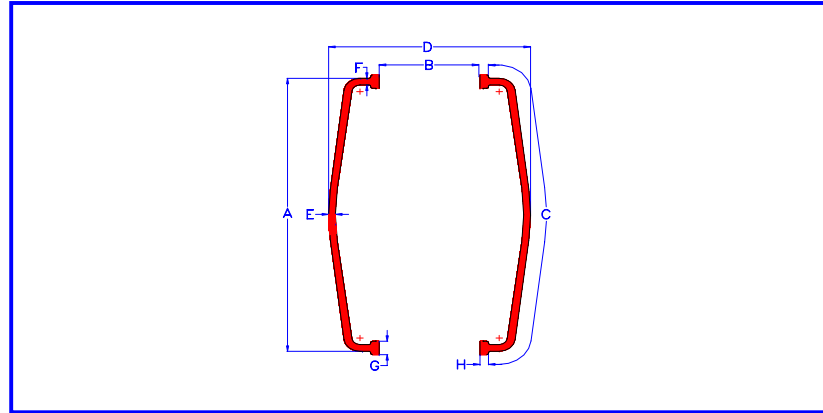

QUALITY INJECTION MOLDED BLADDERS

Ref
Tire

Bladder
Order Number

			Overall Height A	Foot I.D. B	Effective Periphery C	Bladder O.D. D	Center Gauge E	Neck Gauge F	Foot Height G	Foot Width H	Net Bladder Weight	Bladder Surface Pattern
13"	13B327352 C130	mm	307.6	219.2	352.0	327.2	9.2	9.1	21.6	12.7	3.64 kg	B-1
		inch	12.11	8.63	13.85	12.88	.360	.360	.85	.50	8.0 lbs	
	13B330359 C9390	mm	328.0	218.4	358.7	330.2	8.4	9.7	22.1	12.7	3.70 kg	B-1
		inch	12.91	8.60	14.12	13.00	.330	.280	.38	.50	8.1 lbs	
	13B349387 C9012	mm	349.8	223.5	387.3	349.3	6.4	9.7	20.8	12.7	3.67 kg	B-1
		inch	13.77	8.80	15.25	13.75	.250	.380	.82	.50	8.1 lbs	
	13B387410 C9391	mm	353.8	218.4	410.2	387.4	8.4	9.7	20.8	12.7	4.47 kg	B-1
		inch	13.93	8.60	16.15	15.25	.330	.380	.82	.50	9.8 lbs	
13B295415 C2767	mm	387.3	215.9	415.4	295.3	6.4	11.9	25.4	12.7	3.10 kg	B-1	
	inch	15.25	8.50	16.35	11.63	.250	.469	1.00	.50	6.8 lbs		
13B353437 C327	mm	395.5	219.0	436.7	352.6	7.1	7.1	22.1	12.7	3.75 kg	B-1	
	inch	15.57	8.62	17.19	13.88	.280	.280	.87	.50	8.3 lbs		
13B387476 C9135	mm	428.1	219.2	476.3	387.4	8.6	9.5	20.8	12.7	5.28 kg	B-1	
	inch	16.86	8.63	18.75	15.25	.340	.375	.82	.50	11.6 lbs		
13B381666 C4319	mm	627.9	215.9	666.3	381.0	6.4	11.9	25.4	12.5	5.30 kg	B-1	
	inch	24.72	8.50	26.23	15.00	.250	.469	1.00	.47	11.7 lbs		
14"	14B374463 C480	mm	430.8	251.0	467.7	374.1	6.4	8.4	22.4	12.7	4.44 kg	B-1
		inch	16.96	9.88	18.22	14.73	.250	.330	.88	.50	9.8 lbs	
	14B406502 C9131	mm	461.2	248.9	501.7	406.4	8.6	9.5	20.8	12.7	5.94 kg	B-1
		inch	18.16	9.80	19.75	16.00	.340	.375	.82	.50	13.1 lbs	

15"	15B402433	mm	388.9	276.4	433.5	402.3	6.4	9.7	23.4	12.8	5.03 kg	B-1
	C320	inch	15.31	10.88	17.07	15.84	.250	.380	.92	.50	11.1 lbs	
	15B425464	mm	418.4	276.4	464.1	425.6	6.4	9.8	23.4	12.8	5.37 kg	B-1
	C330	inch	16.47	10.88	18.27	16.73	.252	.386	.92	.50	11.8 lbs	
	15B402487	mm	442.7	276.4	487.1	402.3	6.4	9.7	20.3	12.7	4.54 kg	B-1
	C479	inch	17.43	10.88	19.18	15.84	.250	.380	.80	.50	10.0 lbs	
	15B409501	mm	451.4	276.4	500.8	409.2	8.4	9.7	21.8	12.7	5.93 kg	B-1
	C6391	inch	17.77	10.88	19.72	16.11	.330	.380	.86	.50	13.0 lbs	
	15T409501	mm	451.4	276.4	500.8	409.2	6.4	9.7	21.8	12.7	5.26 kg	B-1
	C9200	inch	17.77	10.88	19.72	16.11	.250	.380	.86	.50	11.6 lbs	
	15B444540	mm	498.6	276.4	539.8	444.5	9.5	9.5	21.8	12.7	5.93 kg	B-1
	C9424	inch	19.63	10.88	21.25	17.50	.375	.375	.86	.50	13.0 lbs	
	15B445629	mm	588.5	276.4	628.7	444.5	9.5	9.5	21.8	12.7	7.64 kg	B-1
	C9132	inch	23.17	10.88	24.75	17.50	.375	.375	.86	.50	16.8 lbs	
	15B445731	mm	653.5	276.4	730.7	444.5	11.2	9.7	21.8	12.7	11.50 kg	B-1
	C6321	inch	25.73	10.88	28.77	17.50	.440	.380	.86	.50	25.3 lbs	